



## APC NetShelter Rack PDU Advanced, Metered, 3Phase, 11kW 400V 16A or 11.5kW 415V 20A, 42 Outlets, IEC309

**Brand :** APC

**Product code:** APDU10250ME

**Product name :** NetShelter Rack PDU Advanced, Metered, 3Phase, 11kW 400V 16A or 11.5kW 415V 20A, 42 Outlets, IEC309

- Metered, 11.5kW, 3PH
- 415V, 20A, 520P6
- 42 Outlet
- Power metering via remote access
- High Density
- Availability
- Agility
- Manageability


NetShelter Rack PDU Advanced, Metered, 3Phase, 11kW 400V 16A or 11.5kW 415V 20A, 42 Outlets, IEC309

APC NetShelter Rack PDU Advanced, Metered, 3Phase, 11kW 400V 16A or 11.5kW 415V 20A, 42 Outlets, IEC309. PDU types: Metered, Rack capacity: 0U, Type: Three-phase. AC outlets quantity: 42 AC outlet(s), AC outlet types: C13 coupler, C15 coupler, C19 coupler, C21 coupler, Power plug: IEC 60309. LED indicators: Activity, Network, Power, Cable length: 1.8 m, Security algorithms: 128-bit AES, 192-bit AES, 256-bit AES, DES, MD5, SNMP, SNMPv2, SNMPv3. Monitoring: Current, Humidity, Power, Temperature, Voltage, Outlet control: Lock-out, Recycle, Turn on, Firmware upgradeable via: Network, USB. Nominal input voltage: 400 V, Maximum current: 16 A, AC input frequency: 50 - 60 Hz



| Design                        |                                                                               | Power                                |             |
|-------------------------------|-------------------------------------------------------------------------------|--------------------------------------|-------------|
| PDU types *                   | Metered                                                                       | Nominal output voltage               | 230 V       |
| Type                          | Three-phase                                                                   | Output voltage                       | 230 V       |
| Form factor                   | Rackmount                                                                     | Load capacity                        | 11500 VA    |
| Rack capacity *               | 0U                                                                            | Number of phases                     | 3           |
| Mounting                      | Vertical                                                                      | Maximum total current draw per phase | 16 A        |
| Product colour                | Black                                                                         | Power protection features            | Overload    |
| Display                       | LCD                                                                           | Maximum power                        | 11040 W     |
| On/off switch                 | ✓                                                                             | Surge protection                     | ✓           |
| Regulatory Approvals          | CE, CSA C22.2 No 62368-1, EN 62368-1, FCC part 15 subpart B, UKCA, UL 62368-1 | <b>Certificates</b>                  |             |
| <b>Ports &amp; interfaces</b> |                                                                               | Compliance certificates              | RoHS        |
| AC outlets quantity *         | 42 AC outlet(s)                                                               | <b>Operational conditions</b>        |             |
| Power plug                    | IEC 60309                                                                     | Operating temperature (T-T)          | -5 - 60 °C  |
| AC outlet types *             | C13 coupler, C15 coupler, C19 coupler, C21 coupler                            | Storage temperature (T-T)            | -25 - 65 °C |
| Ethernet LAN (RJ-45) ports    | 2                                                                             | Operating relative humidity (H-H)    | 5 - 95%     |
| USB ports quantity            | 1                                                                             | Storage relative humidity (H-H)      | 5 - 95%     |
| <b>Features</b>               |                                                                               | Operating altitude                   | 0 - 3048 m  |
| Daisy chain                   | ✓                                                                             | Non-operating altitude               | 0 - 15240 m |
| Reset button                  | ✓                                                                             | Operating temperature (T-T)          | 23 - 140 °F |
| LED indicators                | Activity, Network, Power                                                      | <b>Weight &amp; dimensions</b>       |             |
| Colour-coded outlets          | ✓                                                                             | Width                                | 56 mm       |
| Cable length                  | 1.8 m                                                                         | Depth                                | 55 mm       |
| Security algorithms           | 128-bit AES, 192-bit AES, 256-bit AES, DES, MD5, SNMP, SNMPv2, SNMPv3         | Height                               | 1490 mm     |
| Password protection           | ✓                                                                             | Weight                               | 5.7 kg      |
|                               |                                                                               | <b>Packaging data</b>                |             |
|                               |                                                                               | Package weight                       | 7.7 kg      |
|                               |                                                                               | Package width                        | 208 mm      |

| Features                 |                                                                     | Packaging data                      |         |
|--------------------------|---------------------------------------------------------------------|-------------------------------------|---------|
| Compatible products      | Compatible with most NetShelter SX enclosures and third-party racks | Package depth                       | 116 mm  |
|                          |                                                                     | Package height                      | 1720 mm |
| Management features      |                                                                     | Logistics data                      |         |
| Monitoring               | Current, Humidity, Power, Temperature, Voltage                      | Total carbon footprint (kg of CO2e) | 8717.32 |
| Outlet control           | Lock-out, Recycle, Turn on                                          |                                     |         |
| Firmware upgradeable     | ✓                                                                   |                                     |         |
| Firmware upgradeable via | Network, USB                                                        |                                     |         |
| Power                    |                                                                     |                                     |         |
| Nominal input voltage *  | 400 V                                                               |                                     |         |
| AC input frequency       | 50 - 60 Hz                                                          |                                     |         |
| Maximum current *        | 16 A                                                                |                                     |         |

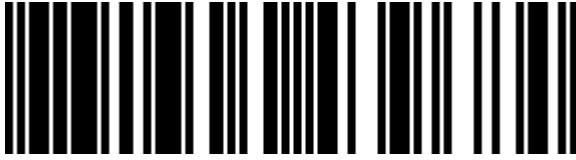

0731304439684



731304439684

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.