



APC NetShelter Rack PDU Advanced, Switched Metered Outlet, 3Phase, 11kW 400V 16A or 11.5kW 415V 20A, 48 Outlets, IEC309

Brand : APC

Product code: APDU10250SM

Product name : NetShelter Rack PDU Advanced, Switched Metered Outlet, 3Phase, 11kW 400V 16A or 11.5kW 415V 20A, 48 Outlets, IEC309

- Switched Metered Outlet, 11.5kW, 3PH
- 415V, 20A, 520P6
- 48 Outlet
- Power metering via remote access
- High Density
- Availability
- Agility
- Manageability


NetShelter Rack PDU Advanced, Switched Metered Outlet, 3Phase, 11kW 400V 16A or 11.5kW 415V 20A, 48 Outlets, IEC309

APC NetShelter Rack PDU Advanced, Switched Metered Outlet, 3Phase, 11kW 400V 16A or 11.5kW 415V 20A, 48 Outlets, IEC309. PDU types: Metered, Metered-by-outlet, Switched, Rack capacity: 0U, Type: Three-phase. AC outlets quantity: 48 AC outlet(s), AC outlet types: C13 coupler, C15 coupler, C19 coupler, C21 coupler, Power plug: IEC 60309. LED indicators: Activity, Network, Power, Cable length: 1.8 m, Security algorithms: 128-bit AES, 192-bit AES, 256-bit AES, DES, MD5, SNMP, SNMPv2, SNMPv3. Monitoring: Current, Humidity, Power, Temperature, Voltage, Outlet control: Lock-out, Recycle, Turn off, Turn on, Firmware upgradeable via: Network, USB. Nominal input voltage: 400 V, Maximum current: 16 A, AC input frequency: 50 - 60 Hz



Design		Power	
PDU types *	Metered, Metered-by-outlet, Switched	Nominal output voltage	230 V
Type	Three-phase	Output voltage	230 V
Form factor	Rackmount	Load capacity	11500 VA
Rack capacity *	0U	Number of phases	3
Mounting	Vertical	Maximum total current draw per phase	16 A
Product colour	Black	Power protection features	Overload
Display	LCD	Maximum power	11500 W
On/off switch	✓	Surge protection	✓
Regulatory Approvals	CE, CSA C22.2 No 62368-1, EN 62368-1, FCC part 15 subpart B, UKCA, UL 62368-1	Certificates	
		Compliance certificates	RoHS
Ports & interfaces		Operational conditions	
AC outlets quantity *	48 AC outlet(s)	Operating temperature (T-T)	-5 - 60 °C
Power plug	IEC 60309	Storage temperature (T-T)	-25 - 65 °C
AC outlet types *	C13 coupler, C15 coupler, C19 coupler, C21 coupler	Operating relative humidity (H-H)	5 - 95%
Ethernet LAN (RJ-45) ports	2	Storage relative humidity (H-H)	5 - 95%
USB ports quantity	1	Operating altitude	0 - 3048 m
		Non-operating altitude	0 - 15240 m
		Operating temperature (T-T)	23 - 140 °F
Features		Weight & dimensions	
Daisy chain	✓	Width	56 mm
Reset button	✓	Depth	75 mm
LED indicators	Activity, Network, Power	Height	1490 mm
Colour-coded outlets	✓	Weight	7.7 kg
Cable length	1.8 m		
Security algorithms	128-bit AES, 192-bit AES, 256-bit AES, DES, MD5, SNMP, SNMPv2, SNMPv3	Packaging data	
Password protection	✓	Package weight	9.7 kg
		Package width	208 mm

Features		Packaging data	
Compatible products	Compatible with most NetShelter SX enclosures and third-party racks	Package depth	116 mm
		Package height	1720 mm
Management features		Logistics data	
Monitoring	Current, Humidity, Power, Temperature, Voltage	Total carbon footprint (kg of CO2e)	12176.66
Outlet control	Lock-out, Recycle, Turn off, Turn on		
Firmware upgradeable	✓		
Firmware upgradeable via	Network, USB		
Power			
Nominal input voltage *	400 V		
AC input frequency	50 - 60 Hz		
Maximum current *	16 A		

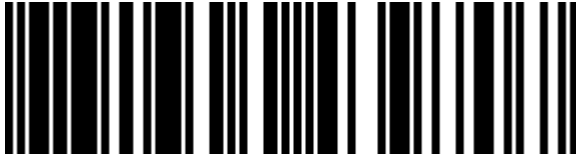

0731304439707



731304439707

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.